KÜNNETH & KNÖCHEL

Technical questionnaire

Please complete this questionnaire to the best of knowledge, adjust and mark where applicable.

Date

Name, first name ☐ Mr. ☐ Mrs.

Company

Street, n°.

Zip Code / City / Country

Phone

E-Mail

BB	
A	
B	
C	
VL	

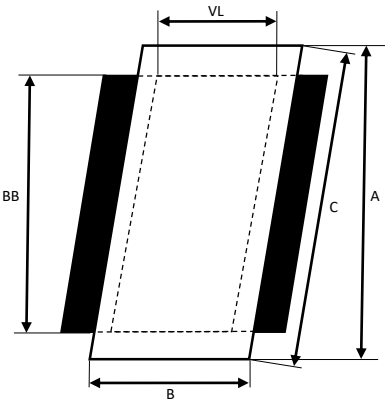

BB = Belt width / mm
A = heating platen width / mm
B = heating platen length / mm
C = edge length / mm
VL = splice length / mm

Beltwidth::
mm

Splicelength::
mm

☐ **Steel cord ST:** z.B. ST2000
Belt specification:

☐ **Textile EP:** z.B. EP630/4
Belt specification:

Type of splice:

☐ rhombic 16,7°
☐ rhombic 22°
☐ rhombic 30°
☐ rectangular 90°



Voltage:

☐ 400V ☐

Current:

☐ 3 Phase ☐

Surface pressure:

☐ 70 N/cm² ☐ 80 N/cm² ☐ 120 N/cm²

☐

Steuerung:

☐ automatic with data logger

Pressure system:

☐ MDT Mechanic (max. 80 N/cm²)

☐ HDT Hydraulic ☐ hand pump ☐ motor pump

☐ HS pressure bag ☐ air (max.70 N/cm²) ☐ water

☐ CL compact vulcanizer

Cooling system:

☐ no cooling ☐ water

Send

Künneth & Knöchel KG - Bussardweg 9 - D-41468 Neuss
Tel: +49 (0) 21 31 / 34 38 01
Fax: +49 (0) 21 31 / 34 38 30
vulcanizer@kuenneth-knoechel.de