




Technical data sheet

AC2-32TouchCon / AC2-32TouchCon

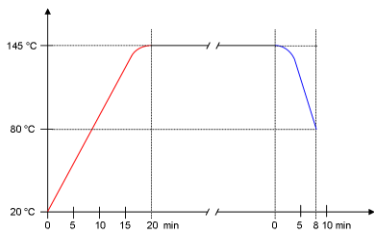

Description	Fully automatic controller for vulcanizing heating plates	
Type	AC2-32TouchCon	AC2-63TouchCon
art. n°	120.006.121	120.006.123
Housing	Highly developed thermoplastic, extremely resistant to mechanical stress at high and low temperatures. Exceptionally good heat transmission resistance for optimum heat discharge.	
Dimensions	325 x 350 x 340 mm	
Weight	11,6 kg	
Voltage	400V (others on request)	
Input	Harting, 32A, 400V, 5P, IP67	Harting, 63A, 400V, 5P, IP67
Output	2 x Harting, 16A, 400V, IP67, 6P+PE 1x 230V, 16A, Schuko	2 x Harting, 32A, 400V, IP67, 6P+PE 1x 230V, 16A, Schuko
Protection	1x RCD 4P, 400V, 40A, 0,03A 2x line safety switch 3P 400V 16A B 3x line safety switch 1P 400V 16A B	1x RCD 4P, 400V, 40A, 0,03A 2x line safety switch 3P 400V 32A B 3x line safety switch 1P 400V 32A B
Controller	2-zone temperature controller with touch control panel	
Protection	IP54	
Phase display	3x LED	
Connectivity	1x USB (Read data, protocol) 1x Ethernet RJ45 (Service)	
Optional	Pipe protection frame, pressure indicator, humidity, WiFi	